

# **DDP40 XS**

**Single Drum Puller**




**HOGG & DAVIS, Inc.**

**Designers and  
Manufacturers  
of Line  
Construction  
Equipment**

***RUGGED DEPENDABILITY***

# ODP 40 XS

## Single Drum Puller

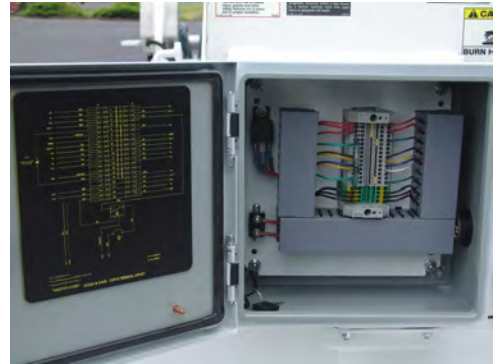

### Single-Drum Puller

#### Performance:

Line Pull Rating	Continuous	4,000lbs-Full Drum
Speed	Infinitely Variable	0.0-5.5 MPH-Full Drum

#### Drum Capacity:

Rated Diameter	44"
Width	40"
Core Diameter	12"
Rope Rated Capacity	10,000' of 5/8" Diameter
Number of Drums	1

#### Drive System:

Engine	69.3 hp@ 2500 rpm 4TNV98C-NYEM Yanmar Diesel
Hydraulic Drive	Closed Loop Hydrastatic
Drive Train Brake	Spring Applied/ Hydraulically Released
Drum Engagement	Manual mechanical clutch at drive motor
Over-Spin Brake	16" Diameter Vented Bronze Rotor
Brake Actuator	Accumulator with rotory adjustment

#### Unit Dimensions:

Length	194" (16'2")
Width	98" (8'2")
Height	97.5" (8'1-1/2")
Weight (With Rope and Fluids)	10,700lbs

#### Description:

The ODP40 XS single-drum puller is capable of line pull of 4,000lbs. An Over-spin brake with a hydraulic actuator is on the drum. Operator controlled post style level wind allows for even winding of the rope. All unit functions are centrally located at the operator's station. Engine display includes tachometer, temp, and voltage. Pulling is controlled with an electric over hydraulic joystick allowing for infinite control of line speed.



#### Optional Equipment:

Hydraulic Tongue Jack (1)
Hydraulic Outriggers (2)
Hydraulic Outriggers (3)
Tool Circuit: 10GPM, Soliniod Control
Spare Tire and Wheel

Product improvements may be introduced at any time, specifications are subject to change without notice.



**P.O.Box 405  
3800 Eagle Loop  
Odell, Oregon 97044  
TEL(541)354-1001  
FAX(541)354-1080**

**Visit us at  
[www.hoggdavis.com](http://www.hoggdavis.com)**