

DDP40-4XS

Four Drum Puller




HOGG & DAVIS, Inc.

**Designers and
Manufacturers
of Line
Construction
Equipment**

RUGGED DEPENDABILITY

ODP40-4 XS

Four Drum Puller

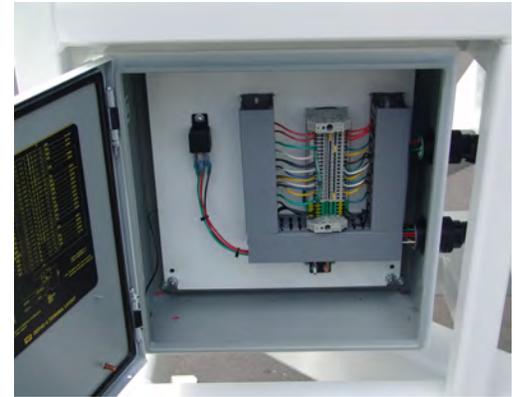

Four-Drum Puller

Performance:

Line Pull Rating	Continuous	4,000lbs-Full Drum
Speed	Infinitely Variable	0.0-5.5 MPH-Full Drum

Drum Capacity:

Rated Diameter	58"
Width	27"
Core Diameter	12"
Rope Rated Capacity	15,000' of 5/8" Diameter
Number of Drums	4

Drive System:

Engine	69.3 hp @ 2,500 rpm 4TNV98C-NYEM Yanmar Diesel
Hydraulic Drive	Closed Loop Hydrastatic
Drive Train Brake	Spring Applied/ Hydraulically Released
Drum Engagement	Drive Pin and Spring
Free Wheel Disconnect	Standard on Each Reel
Over-Spin Brake	30" Diameter Stainless Steel Rotor
Brake Actuator	Accumulator with rotary adjustment

Unit Dimensions:

Length	260" (21'8")
Width	102" (8'6")
Height – Safety Screen Down	108" (9')
Height – Safety Screen Up	122" (10'2")
Weight (With Rope and Fluids)	22,000lbs

Description:

The ODP40-4 HRC XS (High Rope Content) is a four-drum puller, capable of line pull of 4,000lbs on a single drum. Each drum can be engaged or disengaged for single or multi-drum pulling. An Over-spin brake with a hydraulic actuator is also included on each drum. Operator controlled post style level wind allows for even winding of the rope.

All unit functions are centrally located at the operator's station.

The Yanmar engine display displays tachometer, temp, and voltage.

Pulling is controlled with an electric over hydraulic, friction joystick allowing for infinite control of line speed.

Optional Equipment:

Hydraulic Tongue Jack (1)
Hydraulic Outriggers (2)
Hydraulic Outriggers (3)
Tool Circuit: 10GPM, Soliniod Control
Spare Tire and Wheel

Product improvements may be introduced at any time, specifications are subject to change without notice.



**P.O.Box 405
3800 Eagle Loop
Odell, Oregon 97044
TEL(541)354-1001
FAX(541)354-1080**

**Visit us at
www.hoggdavis.com**