

DDP40

Single Drum Puller




HOGG & DAVIS, Inc.

**Designers and
Manufacturers
of Line
Construction
Equipment**

RUGGED DEPENDABILITY

ODP 40

Single Drum Puller

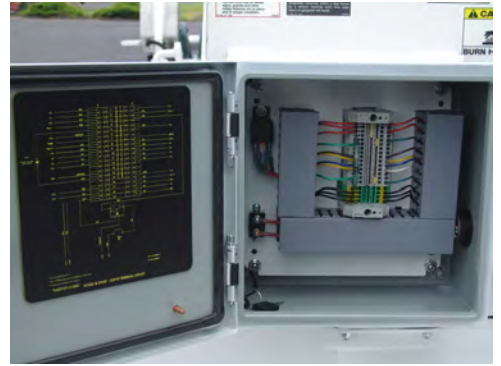

Single-Drum Puller

Performance:

Line Pull Rating	Continuous	4,000lbs-Full Drum
Speed	Infinitely Variable	0.0-4.0 MPH-Full Drum

Drum Capacity:

Rated Diameter	44"
Width	40"
Core Diameter	12"
Rope Rated Capacity	10,000' of 5/8" Diameter
Number of Drums	1

Drive System:

Engine	47.6 hp@ 3000 rpm 4TNV88C-DYEM Yanmar Diesel
Hydraulic Drive	Closed Loop Hydrastatic
Drive Train Brake	Spring Applied/ Hydraulically Released
Drum Engagement	Manual mechanical clutch at drive motor
Over-Spin Brake	16" Diameter Vented Bronze Rotor
Brake Actuator	Accumulator with rotary adjustment

Unit Dimensions:

Length	194" (16'2")
Width	98" (8'2")
Height	97.5" (8'1-1/2")
Weight (With Rope and Fluids)	10,700lbs

Description:

The ODP60 single-drum puller is capable of line pull of 6,000lbs
An Over-spin brake with a hydraulic actuator is on the drum.
Operator controlled post style level wind allows for even winding of the rope.
All unit functions are centrally located at the operator's station.
Engine display includes tachometer, temp, and voltage.
Pulling is controlled with an electric over hydraulic joystick allowing for infinite control of line speed.



Optional Equipment:

Hydraulic Tongue Jack (1)
Hydraulic Outriggers (2)
Hydraulic Outriggers (3)
Tool Circuit: 10GPM, Soliniod Control
Spare Tire and Wheel
Under ground level wind

Product improvements may be introduced at any time, specifications are subject to change without notice.



**P.O.Box 405
3800 Eagle Loop
Odell, Oregon 97044
TEL(541)354-1001
FAX(541)354-1080**

**Visit us at
www.hoggdavis.com**